

SPECIALUV™

Transparent Wood Coating
100% Natural Oil – Exterior



DESCRIPTION

WoodPlus™ SpecialUV™ is a transparent exterior wood coating made of 100% natural oil.

SpecialUV™ is a non-hazardous and ecologically sound product with low emissions (< 20 g/L VOC) and no solvents (non-flammable). SpecialUV™ provides ultimate UV protection and allows the natural moisture of the wood to escape. SpecialUV™ will help preserve and enhance the natural beauty of your wood.

TECHNICAL DATA

Colour: Opaque liquid	Flashpoint: N/A
Odour: Slight oil	VOC content: < 20 g/L
Solids : 10 +/- 1% by weight	Gloss Level: 20-35 G.U. (2 coats)
Weight/gal : 10.48 lb/gal	Viscosity : 250 cpu

RECOMMENDED USES

Special UV™ is ideal for application on decks, fences, gazebos, sheds and garden furniture.

PRODUCT CHARACTERISTICS




- Designed for high performance in any climate
- Outstanding UV protection, water repellent
- Self priming, water reducible
- Excellent physical wear characteristics
- Easy application, quick drying
- Excellent colour retention
- Breathable finish
- Simple maintenance: clean with soap and warm water.

AVAILABLE COLOURS (Base: Clear 000 or 100 Natural for retail stores)



Special colours

Contact Woodplus
for information

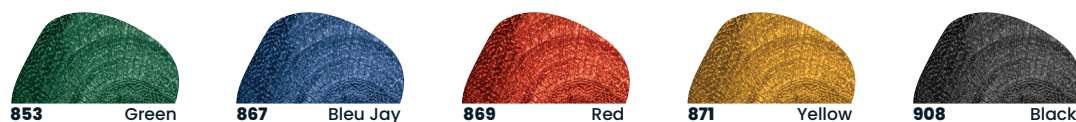

WOODPLUS

ECO WOOD PROTECTION

SPECIALUV™

Transparent Wood Coating
100% Natural Oil – Exterior



COVERAGE

Type of wood surface	First Coat	Second Coat
Smooth surface	400–500 ft ² /gal (40–50 m ² /3.78 L)	500–600 ft ² /gal (50–60 m ² /3.78 L)
Rough/textured surface	250–300 ft ² /gal (20–30 m ² /3.78 L)	350–400 ft ² /gal (35–40 m ² /3.78 L)

Note: The above coverage is approximate and may vary due to surface porosity of the substrate.

SURFACE PREPARATION INSTRUCTIONS

- Wood must be clean and dry (less than 19% moisture content).
- Remove all dirt dust, wax, grease, mildew and mill glaze.
- Do not apply over acrylic, varnish and urethane surfaces.
- New smooth wood must be sanded with 60–80 grit sandpaper to remove mill glaze.
- Remove all sanding dust with clean rags and acetone prior to application.

APPLICATION INSTRUCTIONS

TWO COATS (2–4 hours between coats)

- Product is ready to use. Do not thin.
- Stir thoroughly before and during use.
- DO NOT apply in direct sunlight or on a surface that is hot to the touch.
- Temperature must be above 10°C and not more than 30°C.
- Apply in the direction of the grain completing a full board at a time.
- Maintain a wet edge and saturate any open or cut end boards.
- DO NOT apply in wet weather or when inclement weather is imminent.

CLEAN UP

Clean equipment with warm soapy water immediately after use.

DRY TIME

- To the touch (1 hour)
- Recoat (2–4 hours)
- Light traffic (24 hours)

AVAILABLE CONTAINER SIZES

- 1 gallon (3.78 L), 5 gallons (18.75 L)
- *Drums (200 L) and Tote (1 000 L)
*industrial only.

MAINTENANCE

Clean surfaces regularly: thorough cleaning with garden hose/sprayer and a soft brush to remove dirt, debris, and effects of weather on the coating. DO NOT use chemical strippers/cleaners to clean surfaces before coating. Inspect surfaces on a regular basis to identify damaged areas (wood cracks, splits, loose or rotten boards, etc.) and repair them quickly to prevent further deterioration. Apply maintenance or touch-up coats as required.

WARRANTY

This product will give full satisfaction if applied according to the manufacturer's instructions. Manufacturer's liability is limited to the replacement of the product and does not include manpower if found defective upon inspection.



woodpluscoatings.com
admin@woodcoatings.com
Toll free: 1-844-373-9663